


# SMD HIGH CURRENT INDUCTORS



**MODEL NO. : SSC-10630N2 HF SERIES**

**FEATURES:**

- \* LOW CORE LOSS, HIGH EFFICIENCY PERFORMANCE, HIGH MAGNETIC CHARACTERISTICS.
- \* AEC-Q200 COMPLAINECE.
- \* RIBBON WIRE STRUCTURE.
- \* CUSTOM DESIGNS AVAILABLE.
- \* COMPLIANT WITH RoHS AND HALOGEN FREE.

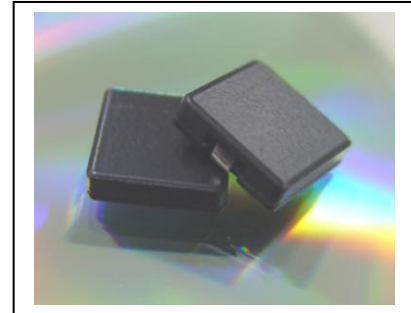

**APPLICATION :**

- \* NOTEBOOK COMPUTERS.
- \* VGA CARD.
- \* DC/DC CONVERTER IN POWER REGULATION SYSTEM.

**ELECTRICAL SPECIFICATION:**

PART NO	INDUCTANCE ( $\mu$ H) $\pm 20\%$ @0ADC	INDUCTANCE ( $\mu$ H) TYP	TEMPERATURE RISE CURRENT (ADC)	INDUCTANCE ( $\mu$ H)Typ	SATURATION CURRENT (ADC) (NOTE 3)	DCR $\pm 10\%$ (m $\Omega$ )
SSC-10630N2-R20 HF	0.20 $\pm 30\%$	0.185	26.0	0.18	28.0	0.79
SSC-10630N2-R35 HF	0.35 $\pm 30\%$	0.32	17.0	0.30	20.0	2.20
SSC-10630N2-R56 HF	0.56	0.45	19.0	0.44	20.0	2.20
SSC-10630N2-R68 HF	0.68	0.57	12.5	0.54	14.5	5.10
SSC-10630N2-1R0 HF	1.00	0.85	12.5	0.80	14.5	5.10
SSC-10630N2-1R2 HF	1.20	0.90	11.0	0.92	10.0	6.70
SSC-10630N2-1R6 HF	1.65	1.38	11.0	1.32	13.0	6.70
SSC-10630N2-2R2 HF	2.20	2.00	8.00	1.85	10.5	11.5


NOTE(1): Test frequency: 100 KHZ,1Vrms.

NOTE(2):  $\Delta T=40^\circ C$  approximately under the temperature rise current.

NOTE(3): The saturation current indicates the value of DC current is approximately 20% lower than its initial value of inductance.

NOTE(4): Operating temperature range:  $-40^\circ C \sim +150^\circ C$

**PHYSICAL DIMENSION : (UNIT:mm)**

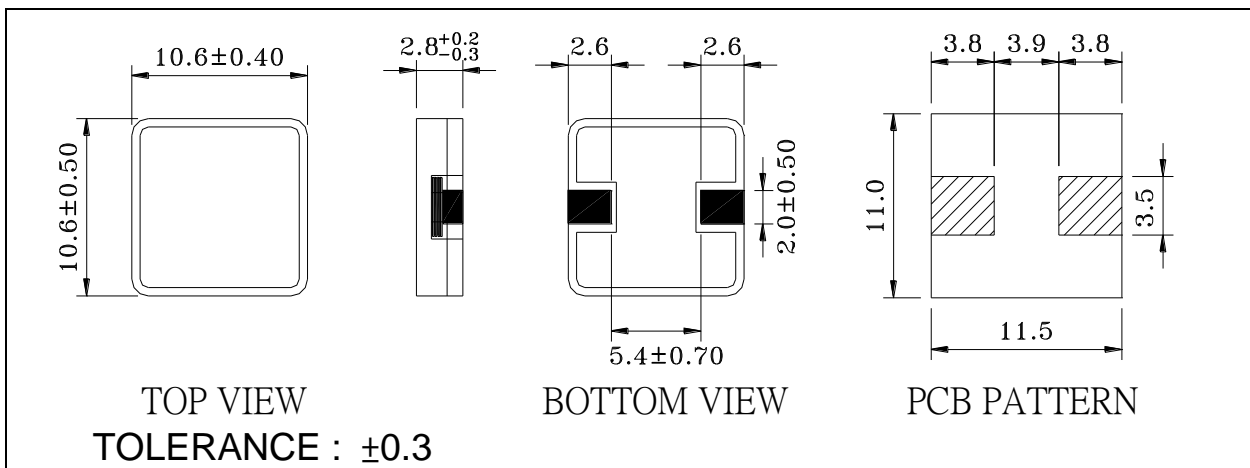

**PACKAGING SPEC:**

1. REEL SIZE & UNITS PER REEL :13",800PCS.
2. TAPE WIDTH:24mm.
3. REEL WIDTH:29.5mm.
4. COMPONENT PITCH:16mm